

AQUATIC AV®

products with a watertight reputation

AQ-BC-6BT BLUECUBE 'HIDE-AWAY' MEDIA PLAYER

for Bluetooth & MP3 devices

USER / INSTALLATION MANUAL



BLUECUBE MEDIA PLAYER



**HALO AERIAL
TECHNOLOGY**



! PLEASE READ THIS INSTRUCTION MANUAL BEFORE
INSTALLATION AND OPERATION !

1 Getting Started	3
1.1 Contents.....	3
1.2 Connections.....	3
1.3 12-pin Harness Connection.....	4
1.4 Mounting the BlueCube Media Player.....	5
1.5 Bluetooth Antenna Installation.....	5
1.6 Power On.....	6
1.7 Handheld Remote Control Charging.....	6
1.8 Handheld Remote Control Synchronizing.....	6
2 Location of Controls	7
2.1 Wireless Handheld Remote Control.....	7
3 Listening to Devices	8
3.1 Listening via Bluetooth.....	8
3.1.1 Pair with Bluetooth Device.....	8
3.1.2 Listening via Bluetooth Device.....	8
3.1.3 Bluetooth Multi-link.....	8
3.2 Listening via Auxiliary Input.....	8
3.3 Adjust Volume Level.....	8
4 Additional Features	9
4.1 Audio Menu.....	9
4.2 Virtual Bass (VBass).....	9
4.3 External 12V Triggers.....	9
4.4 Bluetooth <i>Halo Aerial Technology</i>	9
5 Specifications & Dimensions	10
5.1 Specifications.....	10
5.2 Dimensions.....	10
6 Warranty Information	11

1.1 Contents

- AQ-BC-6BT BlueCube Media Player
- Wiring Harness (AQ-UNH-2 or manufacturers version)
- Four (4) Stainless Steel Mounting Screws
- User/Installation Manual
- Mounting Template*
- Bluetooth Antenna

*Retail packaged models only.

1.2 Connections (see Diagram 1.2.1)

1. 12-pin Watertight Harness

The 12-pin harness supplies power and ground connections to the BlueCube Media Player and four (4) speaker channel output connections from the BlueCube Media Player (see Wiring Diagram 1.3.1 on page 5).

 *Do not cut or modify the 12-pin harness on the BlueCube side or warranty will be void.*

2. Auxiliary Outputs

Allows external amplifiers to be connected to power additional speakers.

3. Auxiliary Inputs

Allows an additional RCA input, from a standalone unit or another stereo source.

4. Remote 8-pin DIN Cable (x2)

Allows connection of the optional wired and wireless Remote Controls (sold separately).

5. 12V DC External Trigger (x2)

Allows for external lighting or relays to be triggered (2A max load). This feature is only available when using the optional Remote Controls (sold separately).

6. Power On LED

When the BlueCube is powered On the LED will illuminate red.

7. Bluetooth *Halo Aerial* Connector


Connect the Bluetooth *Halo Aerial Technology* Antenna (AQ-BTANT-1) to the male SMA connector. Do not apply excessive torque on the SMA connector (no more than 0.5N-m). Use hands to tighten the connection (do not use a wrench). See section 1.5

8. Power Attenuation Wires

The AQ-BC-6UBT power has been factory set to -3dB of maximum power to avoid blowing very small speakers used spa applications. See section 1.6 for further details.

 *Aquatic AV does not recommend the wired Remote Control (AQ-WR-6F) for use in spa applications.*

1.2.1 Connections Diagram

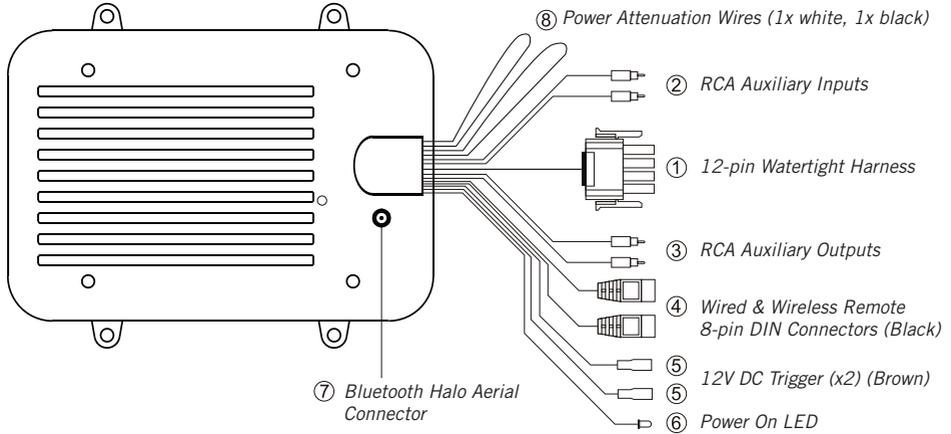


1.3 12-pin Harness Connection

The AQ-BC-6BT includes the universal harness AQ-UNH-2 in order to connect the stereo to power and speakers.


All open wire connections should be soldered and protected against water and dust for best long-term performance.

1.3.1 12-pin Harness Wiring Diagram

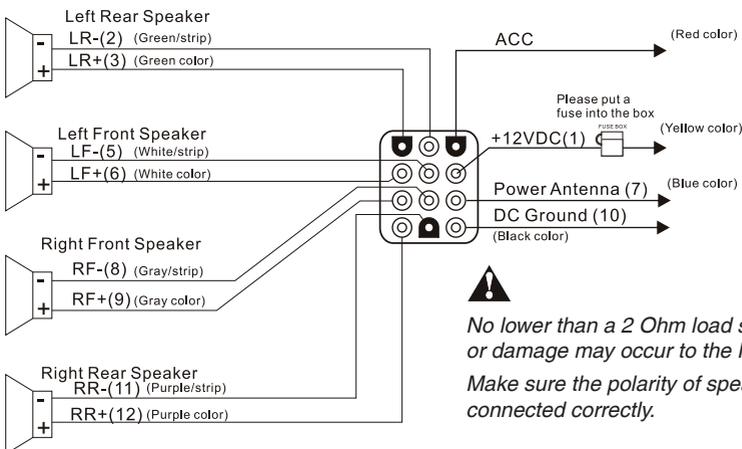


1.4. Mounting the BlueCube Media Player

1. Make sure the outside surface is clean and clear of debris.
2. The BlueCube Media Player has four (4) front screws. Drive the screws using a screw driver. Make sure screws are snug and do not over tighten.



1.5 Bluetooth Antenna Installation

1. Screw on the provided Bluetooth Antenna, avoiding bending the cable at a 90° angle.
2. Install the Bluetooth antenna as high as possible, above the waterline of the spa if possible, and making sure the arrow is pointing directly upwards towards the sky to ensure the Bluetooth range is maximized. If there is no suitable surface to screw it in, we recommend using a good quality double sided tape.

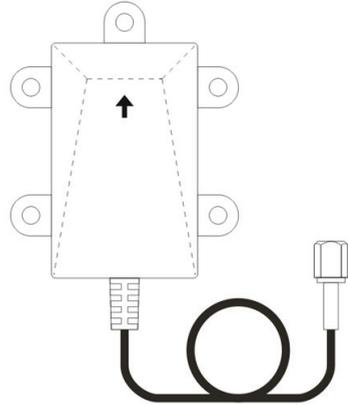

1.6 Power Attenuation Wires

The AQ-BC-6UBT Bluecube+ stereo's power is set to -3dB of the maximum power to avoid blowing very small speakers used spa applications.

By cutting the black wire only the power/volume will increase to the maximum (0dB nominal).

By cutting the white wire only the power/volume will decrease to -6dB.

By cutting both the white and black wires the power/volume will decrease to -9dB.

These modifications should only be carried out by an experienced audio installer.

Black Wire	White Wire	Output Level
Intact (not cut)	Intact (not cut)	-3dB
Cut	Intact (not cut)	0dB (reference)
Intact (not cut)	Cut	-6dB
Cut	Cut	-9dB

i Should you cut the wrong wires or wish to reconnect them to further alter the attenuation, the Power Attenuation Wires can be crimped back together.

1.6 Power On

The AQ-BC-6BT requires +12V DC to both the red and yellow wires. When both of these wires have power the AQ-BC-6BT is always powered on, indicated by a red LED on the heatsink of the stereo. Ground is connected to the black wire.

In a spa application this requires the red and yellow wires to be jumped together and then connected to the +12VDC output of the power source. In this set up the AQ-BC-6BT will always be on, with a very low current draw when idle.

In a boat, ATV or other application requiring power from a battery, the yellow wire (constant power) should be connected to the battery, and the red wire should be connected to the ignition or a switch.

For detailed instructions you can check out our online video:

‘How to wire your Aquatic AV stereo system’

<http://www.aquaticav.com/support/videos>

1.7 Handheld Remote Control Charging

The optional remote AQ-RF-6UBT-T (sold separately) has a built-in Polymer Lithium re-chargeable battery and comes with a charging cable. Connect one end of the charging cable to the charging connection on remote control and connect the USB end of the charging cable to any USB charger (5V DC) for charging.

Make sure the remote has been charged before used.

1.8 Handheld Remote Control Synchronizing

The optional remote AQ-RF-6UBT-T (sold separately) should be purchased/sold with the RF receiver (AQ-RF-6UBT-R) and should already be paired from the factory. Plug the RF receiver into the remote control 8-pin DIN connections on the BlueCube Media Player. If you need to synchronize the remote, follow the steps below.

1. Make sure BlueCube Media Player is powered ON (red LED)
2. Put the remote within 0.5 meter of the BlueCube Media Player.
3. Press and hold MODE on remote control until the LCD shows “Pairing in Progress”. Release the button.
4. Within 2 seconds, the LCD will show “Paired”. If it fails to pair, the LCD will show “Retry again”. If this happens, wait 5 seconds and repeat steps above.


For any additional remote controls, you will also need to synchronize those remote controls to the BlueCube Media Player.

i *If the pairing process is not successful, try again to put your remote close to the remote receiver or charge the remote control if the battery is low.*

i *Depending on the frequency of usage, the remote may drain its battery. Please charge the remote before use. If the LCD shows nothing, the battery has been drained and will need charging.*

i *If you have lost or damaged your remote control and buy a new remote control, follow the above steps to pair the new remote control.*

2.1 Wireless Handheld Remote Control AQ-RF-6UBT-T (sold separately)

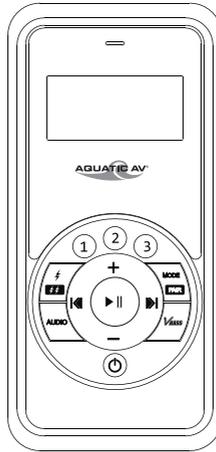

Buttons		AUX IN Mode	Bluetooth Mode
Power		Press once: Toggle Operational mode to Standby mode or vice versa	
Mode/Pair		Press once: Change the source Press and hold: Pair	
Volume Up		Press once: Volume up Press and hold: Fast volume up	
Volume Down		Press once: Volume down Press and hold: Fast volume down	
Fast Forward		Press once: no function Press and hold: no function	Press once: Next track Press and hold: Fast Forward
Fast Rewind		Press once: no function Press and hold: no function	Press once: Previous track Press and hold: Fast backward
Play/Pause		Press once: Toggle mute Press and hold: no function	Press once: Play/Pause Press and hold: no function
1		Press once: Pop Preset Equalizer Press and hold: no function	
2		Press once: Classic Preset Equalizer Press and hold: no function	
3		Press once: Rock Preset Equalizer Press and hold: no function	
EXT Trigger		Press once: Toggle EXT trigger 1 (12V dc) Press and hold: Toggle EXT trigger 2 (12V dc)	
Audio		Press once: no function Press and hold: no function	
VBass		Press once: Toggle VBass ON or OFF Press and hold: no function	

3.1 Listening via Bluetooth

3.1.1 Pair with Bluetooth Device

1. Switch on your Bluetooth device.
2. Select 'AQUATIC AV' from the list of available devices to pair (no password is needed).

3.1.2 Listening via Bluetooth Device

1. Bluetooth mode will be activated once a Bluetooth device is paired.
2. Play the song from device and the sound will play through the BlueCube Media Player.
3. Press PLAY/PAUSE to play/pause the song.
4. Press FAST REWIND/FORWARD buttons to play previous/next song file.
4. Press and hold FAST REWIND/FORWARD buttons to fast forward / fast rewind the song file.
5. Previous/next track and volume up/down can be controlled directly from your Bluetooth device or directly from the BlueCube Media Player remote control.

3.1.3 Bluetooth Multi-link

A second Bluetooth device can pair to the BlueCube Media Player even when it has been paired to another Bluetooth device. The second Bluetooth device will be able to play once the first device has stopped playing.

3.2 Listening via Auxiliary Input

1. Connect your MP3 device to the RCA inputs.
2. Press MODE on the remote control to select 'AUX' mode.

i *Only one Auxiliary input (RCA) can be used at any one time.*


3.3 Adjust Volume Level

1. Press VOLUME UP once to increase the volume.
2. Press VOLUME DOWN once to reduce the volume.
3. Press and hold either VOLUME UP or VOLUME DOWN to increase or decrease audio volume continuously.

4.1 Audio Menu with Handheld Remote Control (sold separately)

When the optional remote control AQ-RF-6UBT-T & AQ-RF-6UBT-R (sold separately) is used with the BlueCube Media Player several functions are unlocked. The audio DSP (Digital Signal Processor) provides preset listening experiences for different music types.

1. To enter audio menu, press once AUDIO button.
2. Each press of AUDIO button will advance to the next audio setting as described on the right.
3. In the audio menu, press and hold AUDIO to save and exit the audio menu back to the original mode.

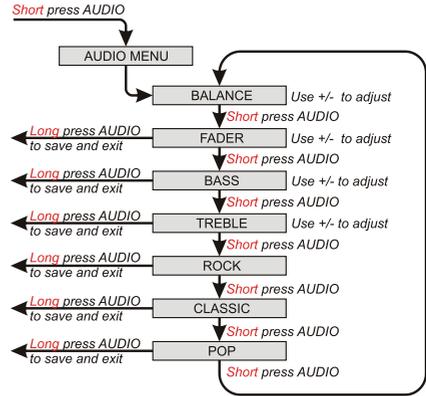

If you have chosen preset equalizer (Rock, Classic, or Pop), the previous Bass & Treble settings will be overridden.

4.2 Virtual Bass (VBass) with Handheld Remote Control (sold separately)

Virtual Bass (VBass) boosts the bass of the audio signal using the latest DSP technology and is particularly useful when used with very small speakers to create perceived bass frequencies of a much larger speaker.

Press VBASS once on the remote control to toggle it ON or OFF.

4.3 External 12V Triggers with Handheld Remote Control (sold separately)

Aquatic AV understands the need for more flexible remote applications. With the BlueCube Media Player Aquatic AV has provided two independent 12V 'accessory' triggers, activated from the remote control. These could activate any 12V based device like 12V lights or 12V motors.

In any operational mode, press the 12V TRIGGER button on the remote control to activate. Press again to deactivate.

If using two external trigger wires you can also activate the second external trigger by pressing and holding the 12V TRIGGER button to activate. Press and hold again to deactivate.

i Aquatic AV strongly recommend you speak to our technical service staff or your local Aquatic AV dealer if you are considering using this feature.

⚠ Load on External Trigger should not exceed 2A.


4.4 Bluetooth Halo Aerial Technology

The Bluetooth Halo Aerial Technology antenna AQ-BTANT-1 (included) improves the standard Bluetooth wireless signal and range, for a stronger signal and increased range.

5.1 Specifications

Media	
Supported media.....	Bluetooth / MP3 / AUX
Device Control.....	via Handheld RF Remote Control or Wired Remote Control (both sold separately)
Inputs	
Auxiliary.....	1x stereo pair RCA
Outputs	
Pre-Out.....	1x stereo pair RCA (2V)
12V Triggers.....	2x 12V DC Triggers (2A)
Power	
Output voltage @ 2 Ohm.....	4x 72W
Output voltage @ 4 Ohm.....	4x 45W
Operation voltage.....	9.6V - 14.4V DC
Max current draw.....	7A
Standby current draw.....	6mA
Multi-Environment Certifications	
Waterproof / Dustproof.....	Yes - IP65
Conformal PCB coating.....	Yes
UV protection.....	500 hours stable, ASTM D4329 compliant
Salt/Fog protection.....	500 hours stable, ASTM B117 compliant
Stainless Steel mountings.....	Yes

5.2 Dimensions

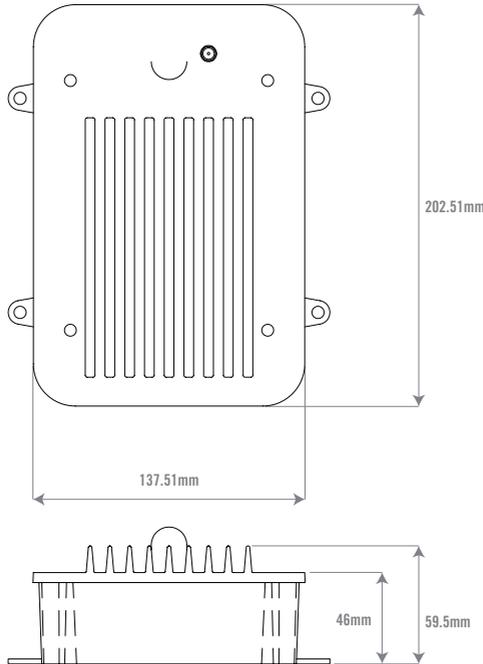

Aquatic AV offers a limited warranty of our products on the following terms:

Length of warranty

2 years on audio systems, electronics, speakers, and accessories (receipt required).

Coverage

This warranty covers only the original purchaser of an Aquatic AV product purchased from an authorized Aquatic AV dealer. In order to receive service, the purchaser must provide Aquatic AV with a copy of the receipt stating the customer name, dealer name, product purchased and date of purchase.

Defective products

Products found to be defective during the warranty period will be repaired or replaced (with a product deemed to be equivalent) at Aquatic AV's discretion.

What is not covered

Damage caused by accident, abuse, improper operations or theft. Any cost or expense related to the removal or reinstallation of product. Service performed by anyone other than an authorized Aquatic AV service center. Any product with the serial number or tamper labels defaced, altered, or removed. Subsequent damage to other components. Any product not purchased from an authorized Aquatic AV dealer.

Limit on implied warranties

Any implied warranties including warranties of fitness for use and merchantability are limited in duration to the period of the express warranty set forth above. Some states do not allow limitations on the length of an implied warranty, so this limitation may not apply. No person is authorized to assume for Aquatic AV any other liability in connection with the sale of the product.

How to obtain service

You must obtain a return material authorization number (RMA) to return any product to Aquatic AV. You are responsible for shipping charges of returned products to Aquatic AV.

Please record the model and serial number[s] of your equipment in the space provided below as your permanent record and will assist us with your factory warranty coverage. These numbers can be found on the rear of the BlueCube Media Player.

Model number[s]:	Serial number[s]:

FCC ID:
MADE IN CHINA

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE:

The equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Consult the dealer or an experienced radio/TV technician for help.

The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user authority to operate the equipment.

Aquatic AV

282 Kinney Drive
San Jose, CA 95112, USA

E-mail: info@aquaticav.com

US & Canada: 1 877 579 2782

International: +1 408 559 1668

Fax: +1 408 559 0125

www.aquaticav.com

AQUATIC AV[®]
products with a watertight reputation